

CASCOS

Profesionales de la elevación

Lifting professionals

Professionnels de l'élévation

CASCOS 

3.000 Kg.

Doble tijeras

Double scissors lift


Pont élévateur à double ciseaux prise sous coque

CASCOS 



3.000 Kg.

Encastrable / Inground Version / Version à Encastrer

DT 3600 E ADVANCE 3,6 Tn Ref. 13165

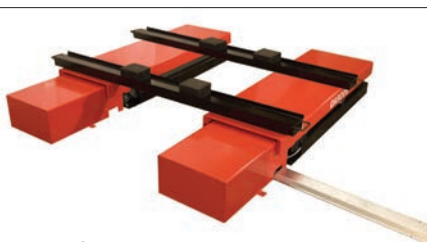

Opción: Kit de travesaños 4 x 4.
Option: 4x4 lifting bars.
Option : traverse de levage 4X4.

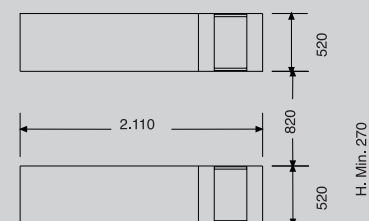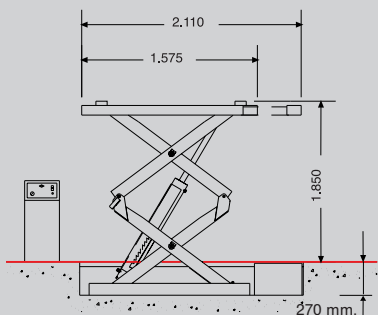

3.600 Kg

875 Kg.

400V - 3Kw - 3Ph - 50 ó 60 Hz
230V - 2.2Kw - 1Ph - 50 ó 60 Hz

6-8 bar



Elevador totalmente reversible en el sentido de la carga.
Lift fully reversible.
Pont réversible à la charge.



Sistema eléctrico simplificado y fiable (sin tarjeta electrónica).
Simplified and reliable electric system (without Electronic cards).
Système électrique simplifié et fiable (sans carte électronique).



Cilindros hidráulicos de mayor diámetro que trabajan a menor presión.
Great diameter hydraulic cylinders that work on lower pressure.
Vérins hydrauliques de grand diamètre qui travaillent en pression plus faible.

Cilindros fabricados y controlados uno a uno en nuestra fábrica.
Cylinders manufactured and tested one by one in our factory.
Vérins fabriqués et testés unitairement en notre usine.



Versión sobre suelo. Entrada.Parada.
On ground version. Run in-stop ramps.
Available run in-run out.
Version posée au sol. Entrée Butée.
Disponible: Entrée-Sortie.



Longitud máxima del extensible 2.110 mm.
Maximum length of extensible 2,110 mm.
Longueur d'extensible 2.110 mm.

Estructura y base muy robusta de llanta maciza.
Very solid structure and base "solid profiles".
Structure et embase très robuste "profiles plein".

Fotocélula protegida integrada en la tijera.
Protected photocell integrated on the scissor.
Photocellule protégée et intégrée dans le ciseaux.




Seguridad neumática-mecánica e hidráulica
Pneumatic - mechanical and hydraulic securities.
Sécurité pneumatique - mécanique et hydraulique

Sobre suelo / Onground version / Version posée au sol

Perfil bajo / Low profile / Profil bas: 105 mm.

EVO III 3 Tn H. min. 105 mm.

Ref. 13193



3

Plataforma diseñada en forma de "V" más resistente y ayuda a centrar el vehículo.

Platform specially designed in V shape, more resistant and helps centring vehicle.



Plateau à forme biseautée pour une plus grande résistance et meilleur guidage du véhicule.



Rampas de acceso móviles que funciona como extensible.
Run on ramps that act also as extensible platform.
Rampes d'accès qui fonctionnent aussi comme extensibles.



1

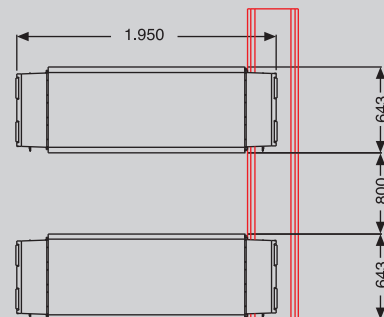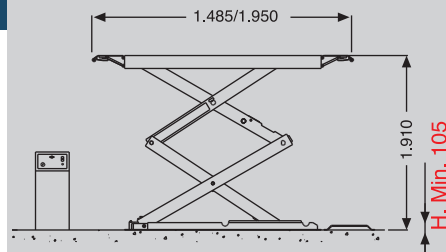

* DIFERENCIAS/ DIFFERENCES/DIFFÉRENCES : EVO II / EVO III


EVO II 3 Tn H. min. 105 mm.

Ref. 13164/44731

Versión empotrada
Inground version
Version encastré

Ref. 13164/44730

Versión sobre suelo
Onground version
Version posée au sol

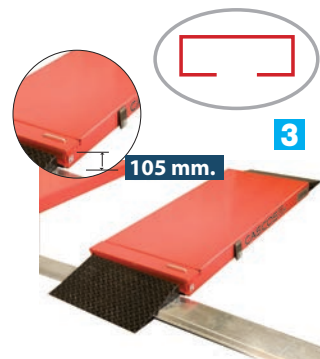



3

Rampas de acceso siempre fijas en el suelo.

Access ramps always fixed to the floor.
Rampes d'accès fixes au sol



Extensible deslizante integrado en pasarela. EVO II
Sliding extension integrated on platforms. EVO II
Extensible coulissant intégré au Plateau. EVO II



* DIFERENCIAS/ DIFFERENCES/DIFFÉRENCES : EVO II / EVO III

Características comunes / Common features / Caractéristiques communes EVO II - EVO III

- **Seguridad hidráulica (no precisa de aire comprimido).**
Hydraulic security (no need of compressed air).
Sécurité hydraulique (pas alimentation d'air).

- **Sistema eléctrico simplificado y fiable (sin tarjeta electrónica).**
Simplified and reliable electric system (without electronic cards).
Système électrique simplifié et fiable (sans carte électronique).

- **Purgado automático mediante botón**
Automatic air bleeding by button
Purge automatique par bouton.

- **Altura mínima 105mm.**
Minimum height 105mm.
Hauteur minimum 105mm.



3.000 Kg.

800 Kg.

230-400/50Hz
(Op. 220/1PH)

- **Elevador totalmente reversible en sentido de la carga.**
Lift fully reversible.
Pont réversible à la charge.

- **Estructura y base muy robusta de llanta maciza.**
Very solid structure and base "solid profiles".
Structure et embase très robuste "profiles plein".



- **Cilindros fabricados y controlados uno a uno en nuestra fábrica.**
Cylinders manufactured and tested one by one in our factory.
Vérins fabriqués et testés unitairement en notre usine.

- **Sistema hidráulico con 4 cilindros. (maestro-esclavo).**
Four cylinders hydraulic circuit (master-slave).
Système hydraulique à Quatre vérins (maître esclave)



Ver condiciones
Look at conditions
Voir conditions



Product Video





DT 3600 E



EVO II



EVO III

Homologado / Homologated / Homologué



RENAULT



PEUGEOT



CITROËN



CASCOS 

PROFESIONALES DE LA ELEVACIÓN

LIFTING PROFESSIONALS

PROFESSIONNELS DE L'ÉLEVATION

C/ Zurrupitieta, 8 / Pol. Ind. Júndiz
Teléfono 945 290 294 / Fax 945 290 055
Apartado de correos 264
Vitoria-Gasteiz
e-mail: info@cascos.es



RWTÜV



2006/42/CE & EN-1493:2011
European Directives
& Approved Standards



CASCOS MAQUINARIA SE RESERVA EL DERECHO DE REALIZAR MODIFICACIONES TÉCNICAS SIN PREVIO AVISO
THE PLANS AND PHOTOGRAPHS SHOWN IN THIS BROCHURE ARE FOR ILLUSTRATIVE PURPOSES ONLY, AND CM RESERVES THE RIGHT FROM TIME TO TIME TO MAKE MODIFICATIONS.
PHOTOS ET DESSINS NON CONTRACTUELS