

C440 MOT ATL

	Туре	Ref.	Min	<mark>∕kg</mark> ↑ ↑	R	\$	€ *
	FLAT PLATFORM with play detector	13353A	135 mm	4Tn	950 Kg.	230-400V/3ph/50Hz/3kW 230V/1ph/50Hz/2,2kW	35"
	3022 2573 18425 18425 1925 1925 1925 1925 1925 1925 1925 19	5160 2160	CASCOS				CASCOS
L.	Flat platform with front recessed and play detect 4335 275,357,663,3035	stor.			4 Tn. C440		



CASCOS (7

LIFTING PROFESSIONALS



Minimal height

Our platforms descend almost to the ground level avoiding the use of bulky run-up ramps to allow sport cars to go in (and consequently, using less garage area).

Security indicator

Indicator that prevents a bad levelling, and ensures that the cylinder works within the best conditions assuring a longer lasting life.

Our platforms are built with:

Reinforced super structure by double T steel beams for intensive use, keeping the platform flat/straight over the vears.





Repairable during at least 10 years.

We ensure spare parts availability during at least this period.



2006/42/CE & EN - 1493:2011 European Directives



REPAIRABLE

CASCOS















Hydraulic cylinders produced and tested one

by one in our factory. The cylinders count with the security valves that detects any lack of oil, closing the circuit and preventing the lift from the descending.

Security x 2

Double security system in each post :


• Mechanical (safety bars) • Pneumatic (security ladders)

Ensures a better reliability than the electromagnetic security system.

4 POST LIFTS C440 MOT ATL


OPTIONAL EQUIPMENT

Oleopneumatic Jacks

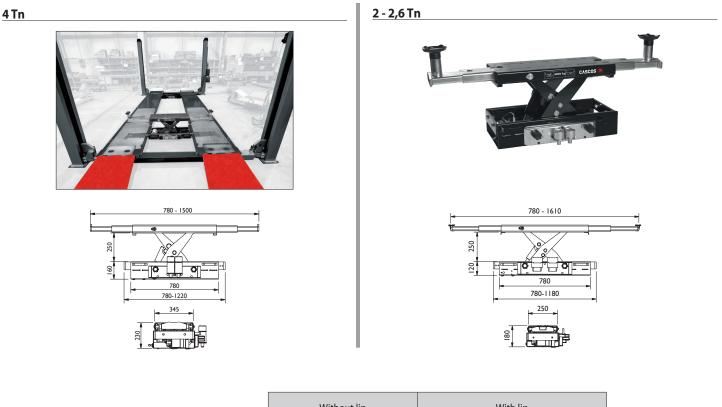

	Without lip	With lip
Capacity	Ref	Ref
2 Tn 2,6Tn 4 Tn	50515 50517 50565	50514 50516 50552

Accesories

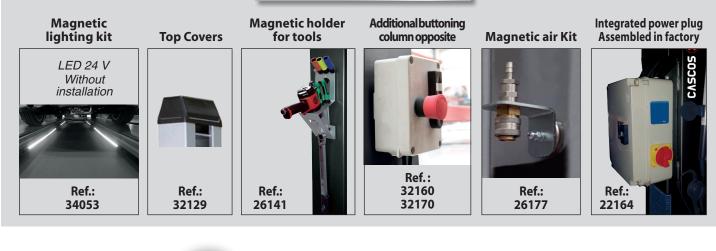

www.cascos.es



CASCOS MAQUINARIA, S.A. Zurrupitieta, 8 - Pol. Ind. Júndiz • Apartado 264 01015 VITORIA-GASTEIZ / España/Spain Tel. +34 945 290 294 / Fax +34 945 290 055 e-mail: info@cascos.es

THE PLANS AND PHOTOGRAPHS SHOWN IN THIS BROCHURE ARE FOR ILLUSTRATIVE PURPOSES ONLY, AND CM RESERVES THE RIGHT FROM TIME TO TIME TO MAKE MODIFICATIONS.