



T4A

Ref.





AUX.

140209

4.000 Kg

2.160-2.260Kg.

3PH 400/230V- 3Kw 50Hz
1PH 230V-2,2Kw 50 Hz

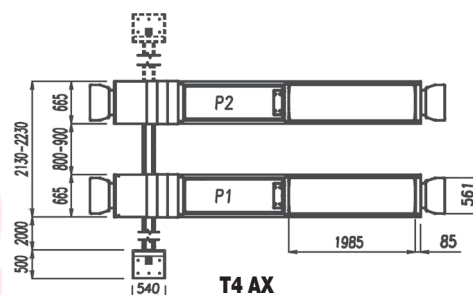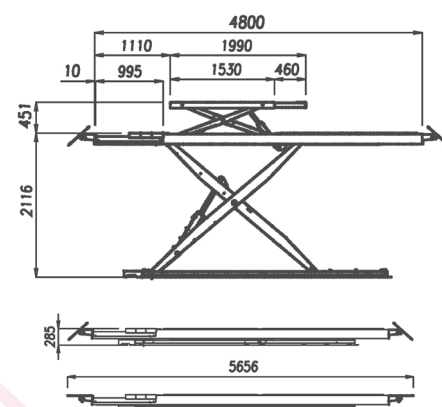

4800 mm. x 660 mm x 285 mm



Ref. 14987F

Inground
version.



T4: Ref. 14950C

T5.5: Ref. 14950C + 14970F

Onground lift with surface
ramps.

Ref. 140209


PLATFORM SCISSORS LIFTS **T4A**



Lift and built in lifting table with double hydraulic circuit
(2 masters + 2 slaves). Hydraulic security .



Extending lift table.




New automatic system searching perfect levelling in each tooth.(A - AX - AXP)



Includes manual descend pump, regulator of the pneumatic pressure and water filter separator.



Very solid structure and base "solid profiles".

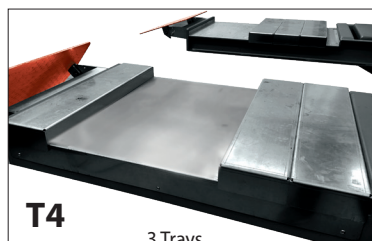

T4

3 Trays.

Mobile front recess through regulating trays.



Includes sliding guide for Jacking Beams.



Pneumatic blocking system of alignment turn tables for easier handling.




Reinforce base of the lift -150 kg.- equipped with **16 regulation points**.



Repairable during at least 10 years.
We ensure spare parts availability during at least this period.

Accessories

Oleopneumatic Jacks




Recess infills kit




Extension ramp




Lightning kit

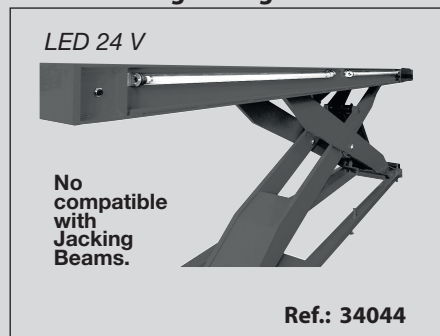


Rubber pads

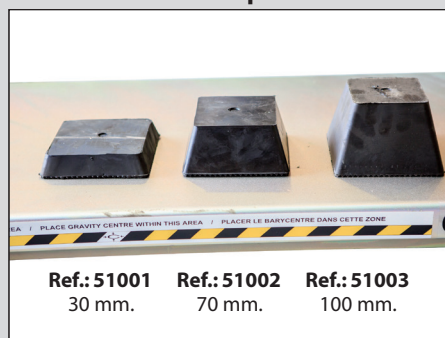

Set of shock absorbers

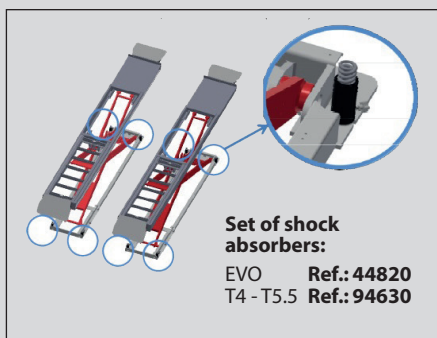

Hose kit

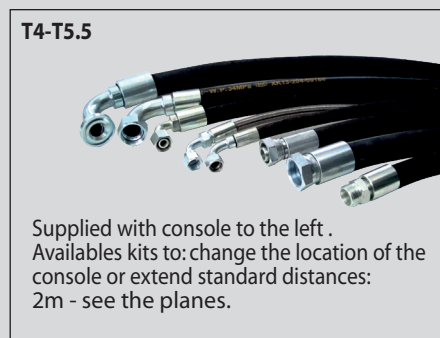

www.cascos.es



CASCOS

CASCOS MAQUINARIA, S.A.

Zurrupitieta, 8 - Pol. Ind. Jundiz • Apartado 264
01015 VITORIA-GASTEIZ / España/Spain
Tel. +34 945 290 294 / Fax +34 945 290 055
e-mail: info@cascos.es

THE PLANS AND PHOTOGRAPHS SHOWN IN THIS BROCHURE ARE FOR ILLUSTRATIVE PURPOSES ONLY, AND CM RESERVES THE RIGHT FROM TIME TO TIME TO MAKE MODIFICATIONS.